


Technical Data Sheet

2.5mm Tahoma Vinyl Plank

General Information

Size	1219mm x 178mm
Thickness	2.5mm
Surface Finish	Embossed Matte Finish
Pattern Variation	Moderate
Wear Layer	0.5mm
Core	PVC Composite
Back Layer	Dry Back
Profile	Square Edge
Pack Coverage	3.91m ²
Pack Weight	18.05kg
Pack Info	18 boards per pack – All full lengths
Pallet Packs	55
Application	Residential & Commercial
Environmental Rating	A+
Maintenance	As per Australian Select Timbers - Tahoma Vinyl Plank's care & maintenance instructions - please refer to: asttimbers.com.au

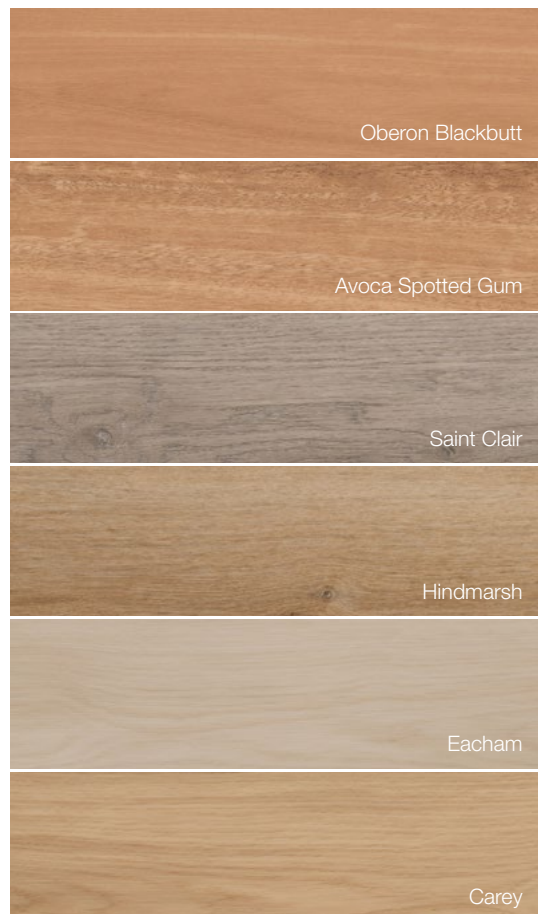

Technical Data Sheet

2.5mm Tahoma Vinyl Plank

Installation

Floated directly on subfloor	No
Fully Bonded	Yes
Nailed	No
Floated on underlay	No
Over Heated Slab*	Yes*

*Please refer to our Installation Instructions and Heated Slab Installation Instructions for more information on our website. For commercial or multi-residential installations, if any additional underlay is required, a formal letter of authorisation from the manufacturer must be obtained prior to the installation.

Test Results & Certificates

Wet Slip Test	AS 4586:2013 Classification: P2+
Dry Slip Test	AS 4586:2013 Classification: D1
Oil Slip Test	AS 4586:2013 Classification: R10
Australian Reaction to fire – FLOOR	ASISO 9239.1-2003 Result CRF 9.7 kw/m ² Smoke Value 113%
Release of formaldehyde (2.5mm)	0.004 mg/m ² /hr (Green Star Standard: 0.1 mg/m ² /hr)

Warranties

Warranty - Residential	Lifetime
Warranty - Commercial	10 Year

Lifetime Residential
Warranty

10 Year Commercial
Warranty

Installation & Warranty

All Tahoma Vinyl Plank floors must be installed by a competent approved installer who has all the necessary skills and take individual site circumstances into account. Tahoma Vinyl Plank warranty will only apply to floors which have been installed according to the installation instructions available in each pack and on the website – asttimbers.com.au

Terms & Conditions: Please note this technical sheet was written by Australian Select Timbers Pty Ltd. All the information is specified correctly while writing and publication of the sheet. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.

Colour Disclaimer: We cannot guarantee that the colours you see printed on this technical data sheet or displayed on our website accurately portrays the true colours of the floorboards. Electrical device's monitors and/or screens are not calibrated equally and colour reproduction on the Internet is not precise. Swatch colours can be verified by ordering a complimentary offcut sample from our website or visiting an Australian Select Timbers' retail partner to view in-store.

Australian Select Timbers Pty Ltd.

www.asttimbers.com.au | 1300 901 355